

zenithinteriors.com

Kissen Table

Zenith



Features:

Derived from the German word for 'cushion', Kissen tables provide a soft design language for the workplace.

Designed for the physical and functional requirements of today's diverse work modes; the Kissen family of tables provide settings for social, collaborative and dynamic work spaces.

The high performance understructure makes economic use of components while maximising setting options. These options include table heights, sizes, worktop shapes and leg orientations and wall-bracket mounting.

Options:

- Linear or 45° Leg: 4, 6, 8 or 10 leg tables
- Shark nose edge or square edge tops
- Lockable castors
- Felt basket, Omni duct, Cable sleeve, additional leg mounted sleeve attached to the inside of leg
- Ctrl rail
- Wall-bracket mounting

Note: Options are dependent on table size/shape

Design: ZENITH DESIGN STUDIO

Certifications: GECA, GREENGUARD, PEFC
AFRDI Level 3: Kissen table timber legs

Warranty: 10 years

Finishes:

Worktop: 25mm laminate, veneer or custom top

Leg & frame: Powder coated in Zenith House Matt/Satin/Fine Texture range

Castors: Black for black legs and silver for all other leg finishes

Felt basket: Grey Echopanel

Omni duct: Powder coated to match the frame

Cable sleeve: Black, white or grey fabric

Stocked models and colours may vary

Zenith House Powder Coat:



Cool White
(Satin/ Matt/
Fine Texture)

Warm White
(Matt)

Cool Grey
(Satin/
Fine Texture)

Gum Grey
(Fine Texture)

Monument
(Matt)

Black
(Satin/ Matt/
Fine Texture)



Chocolate
(Matt/
Fine Texture)



Burnt Umber
(Matt/
Fine Texture)



Blush Pink
(Matt/
Fine Texture)



Rust
(Matt/
Fine Texture)



Sky Blue
(Matt/
Fine Texture)



Indigo
(Matt/
Fine Texture)



Olive
(Matt/
Fine Texture)


Solid Timber Leg:




American Oak

Leg boot can be different finish to the leg and frame
(Aluminium legs only, not applicable for timber legs)

Leg Types



45° Leg



Linear Leg




Table Height


OH: 720/750mm

Top Shapes




Rectangular

Small, Regular & Deep




Emerald


Small, Regular & Deep




Boat




Oval




Square




Square Emerald




Square Boat



Round




Trapezoid



D-End


Configurations

45° Leg




4 Leg

To suit tops: 800 - 1000mm
Top shape: Square




4 Leg

To suit tops: 800 - 1000mm
Top shape: Square Emerald




4 Leg

To suit tops: 800 - 1000mm
Top shape: Square Boat




4 Leg

To suit tops: 1000 - 1800mm
Top shape: Square




4 Leg

To suit tops: 1000 - 1800mm
Top shape: Square Emerald




4 Leg

To suit tops: 1000 - 1800mm
Top shape: Square Boat




4 Leg

To suit tops: 800 - 1100mm dia
Top shape: Round




4 Leg

To suit tops: 1100 - 1800mm dia
Top shape: Round




4 Leg

To suit tops: 1000 - 1500mmD
Min W: 1200mm
Max W: 2300mm
Top shape: Oval



4 Leg regular

To suit tops: 1201 - 1800mmD
Min W: 1200mm
Max W: 2700mm
Top shape: D-end




4 Leg small

To suit tops: 800 - 1200mmD
Min W: 1200mm
Max W: 2700mm
Top shape: D-end


Configurations

45° Leg




4 Leg Small

To suit tops: 800 - 999mmD
Min W: 1200mm
Max W: 2700mm
Top shapes: Rectangle & Emerald




6 Leg Small

To suit tops: 800 - 999mmD
Min W: 2401mm
Max W: 4800mm
Top shapes: Rectangle & Emerald




4 Leg Regular

To suit tops: 1000* - 1800mmD
*Boat tops: 1100 - 1800mmD
Min W: 1200mm
Max W: 2700mm
Top shapes: Rectangle, Emerald & Boat
Suitable with CTRL rail, Omni duct &
Central power box




6 Leg Regular

To suit tops: 1000* - 1800mmD
*Boat tops: 1100 - 1800mmD
Min W: 2401mm
Max W: 4800mm
Top shapes: Rectangle, Emerald & Boat
Suitable with CTRL rail, Omni duct &
Central power box




8 Leg Regular

To suit tops: 1000 - 1800mmD
Min W: 4801mm
Max W: 6000mm
Top shapes: Rectangle & Emerald
Suitable with CTRL rail, Omni duct &
Central power box




10 Leg Regular

To suit tops: 1000 - 1800mmD
Min W: 6001mm
Max W: 8000mm
Top shapes: Rectangle & Emerald
Suitable with CTRL rail, Omni duct &
Central power box




4 Leg Deep

To suit tops: 1801 - 2400mmD
Min W: 1800mm
Max W: 2400mm
Top shapes: Rectangle & Emerald



6 Leg Deep

To suit tops: 1801 - 2400mmD
Min W: 2401mm
Max W: 3600mm
Top shapes: Rectangle & Emerald

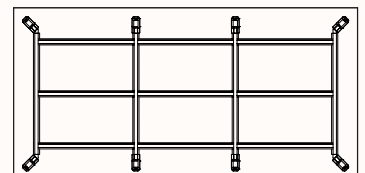


8 Leg Deep

To suit tops: 1801 - 2400mmD
Min W: 3601mm
Max W: 5400mm
Top shapes: Rectangle & Emerald

Configurations

45° Leg




4 Leg

To suit tops: 1000 - 1800mmD

Min W: 1200mm

Max W: 2700mm

Top shape: Trapezoid



6 Leg

To suit tops: 1000 - 1800mmD



Min W: 2401mm

Max W: 4800mm

Top shape: Trapezoid

Configurations

Linear Leg




4 Leg Small

To suit tops: 800 - 999mmD
Min W: 1200mm
Max W: 2700mm
Top shapes: Rectangle

6 Leg Small

To suit tops: 809 - 999mmD
Min W: 2401mm
Max W: 4800mm
Top shapes: Rectangle





4 Leg Regular

To suit tops: 1000 - 1800mmD
Min W: 1200mm
Max W: 2700mm
Top shapes: Rectangle
Suitable with CTRL rail or Omni duct

6 Leg Regular

To suit tops: 1000 - 1800mmD
Min W: 2401mm
Max W: 4800mm
Top shapes: Rectangle
Suitable with CTRL rail or Omni duct



4 Leg regular


Top shape: D-end
Length: 1200-2700mm
Depth: 1201-1800mm

4 Leg small

Top shape: D-end
Length: 1200-2700mm
Depth: 800-1200mm

Configurations


Wall Bracket Mounting



D-End

DE4_WB

Top shape: D-end
Length: 1200-2700mm
Depth: 1101-1700mm



D-End

DE4_WB_S


Top shape: D-end
Length: 1200-2700mm
Depth: 750-1100mm

Cable Management: Omni Duct




Omni Duct


W: 300mm
H: 88.5mm




Omni Duct



Omni Duct with Blank End




Omni Duct with Cable Entry End




Omni Duct with Joint Plate


(Use with share leg)




Closed




Open on Left




Open on Right



Omni Duct with 3 x2 GPO insert





2 GPO Insert



4 GPO Insert

Felt Basket



Max GPO box dimensions 150mm wide x 400mm length x 120mm deep

Leg Cable Sleeve

