

zenithinteriors.com

FYLO Wall Covering

Zenith

Features:

Meet Fylo, a sophisticated character that combines two panels with different thicknesses to give a plain wall a dynamic and contemporary feel. Mirror the elements to go from classy to fun and vice versa to fit various spaces and moods.

Each model comes in a set of 2, set can not be mixed, need to be purchase individually.

Fylo is mounted on the wall with a biodegradable double-contact glue.

Design: IMPACT ACOUSTIC

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- SUPPORTED BY CLIMATE KIC

Warranty: 12 year product

Finishes:
































100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	Moss 439
					
Nordic Pine 311	Grove 317	Sunshine 846	Honeycomb 139	Warm Stone 105	Linen 107
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Snow White 500	Cloud 103	Milk 404	Smoke 442	Ground 108	Slate 444
					
Charcoal 542	Raven 550				

Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)


aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

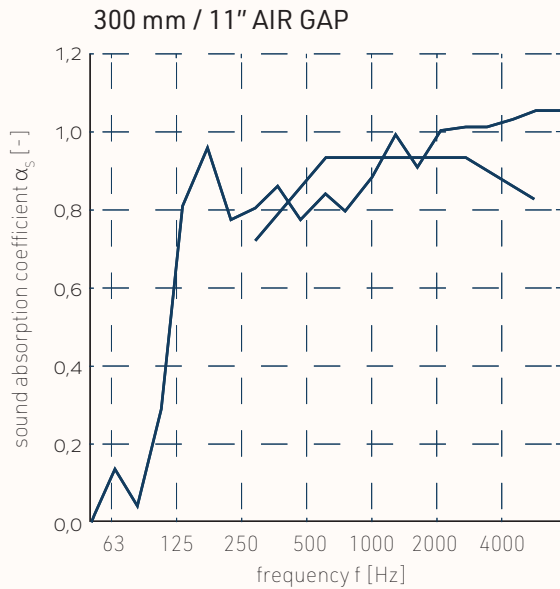

Dimensions

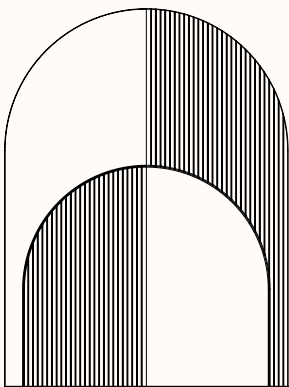


Fylo Wall Covering 24

OW 900mm

OH 2400mm

Thickness: 24mm

Groove placement standard as shown above

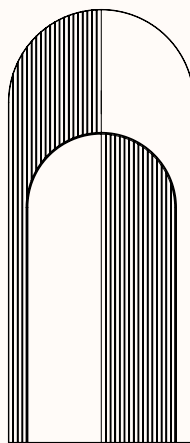

Fylo Wall Covering 12

OW 600mm

OH 2800mm

Thickness: 12mm

Groove placement standard as shown above